versatile™ 4C Surface Mount Collar, SM14D

$32\frac{3}{8}$" ACTUAL

$17\frac{11}{16}$" ACTUAL DEPTH

$52\frac{7}{16}$" ACTUAL

$13\frac{1}{16}$" FROM FINISHED FLOOR TO BOTTOM OF COLLAR

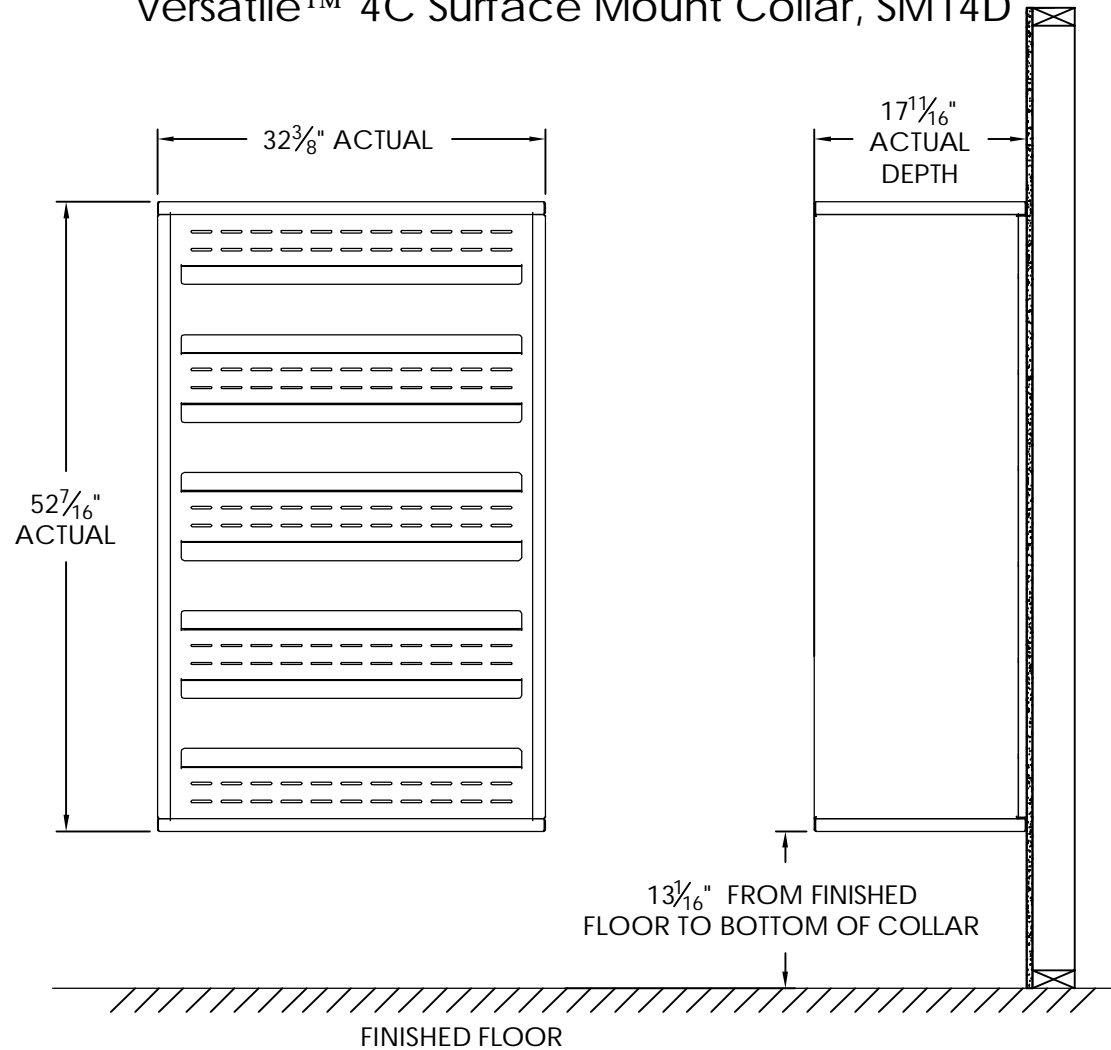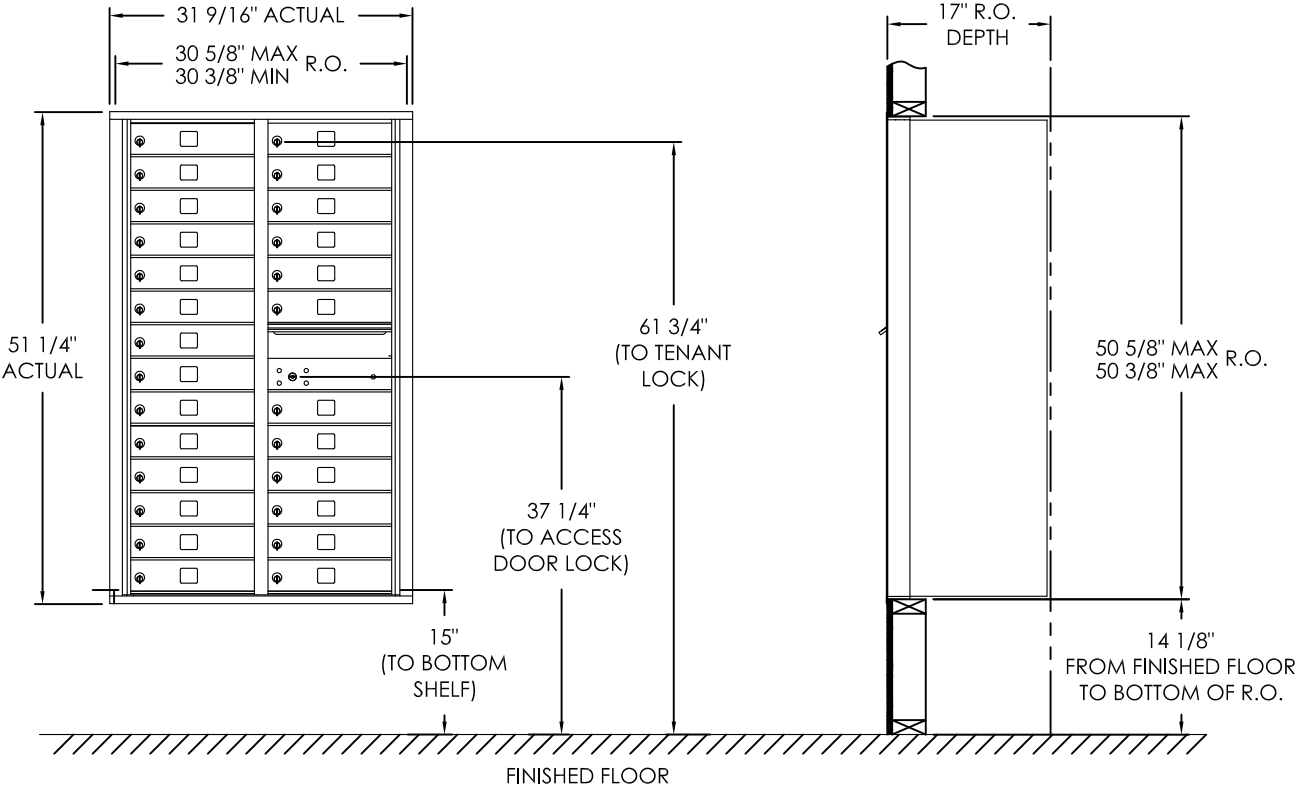FINISHED FLOOR

Notes:
1. Designed to mount Florence Versatile™ 4C mailbox double column 14-High Suite modules (sold separately).
2. For use with front loading modules only.

PRODUCT SERIES: VERSATILE™ 4C SURFACE MOUNT COLLAR

MODEL SM14D	REV B
SCALE NONE	LAST REV DATE 07/02/2014
DRAWING NUMBER SM14DCS	DRAWN BY TNS

versatile™ 4C Mailbox, 4C14D-26

31 9/16" ACTUAL

30 5/8" MAX R.O.
30 3/8" MIN

51 1/4"
ACTUAL

61 3/4"
(TO TENANT
LOCK)

37 1/4"
(TO ACCESS
DOOR LOCK)

15"
(TO BOTTOM
SHELF)

17" R.O.
DEPTH

50 5/8" MAX R.O.
50 3/8" MAX

14 1/8"
FROM FINISHED FLOOR
TO BOTTOM OF R.O.

FINISHED FLOOR

COMPARTMENT CHART

DESCRIPTION	COMPARTMENT	COMPARTMENT SIZE	QTY.
MAILBOX	MB1	3" H x 12" W x 15" D	26
OUTGOING MAIL	OM2	6-1/2" H x 12" W x 15" D	1

PRODUCT SERIES: VERSATILE™ 4C FRONT LOAD MAILBOX

MODEL 4C14D-26	REV	C
SCALE NONE	LAST REV DATE 07/08/19	
DRAWING NUMBER 4C14D-26CS	DRAWN BY RAK	

Notes:
1. This module does NOT meet USPS STD-4C installation specification requirements because there are customer compartments (interior bottom shelf) positioned less than 28" AFF.
2. This 4C mailbox can be used for private applications.
3. The rough opening width for multi-unit 4C installations is provided using the Florence configurator: www.florencemailboxes.com/configurator.