


versatile™ 4C Mailbox, Max Height Suite

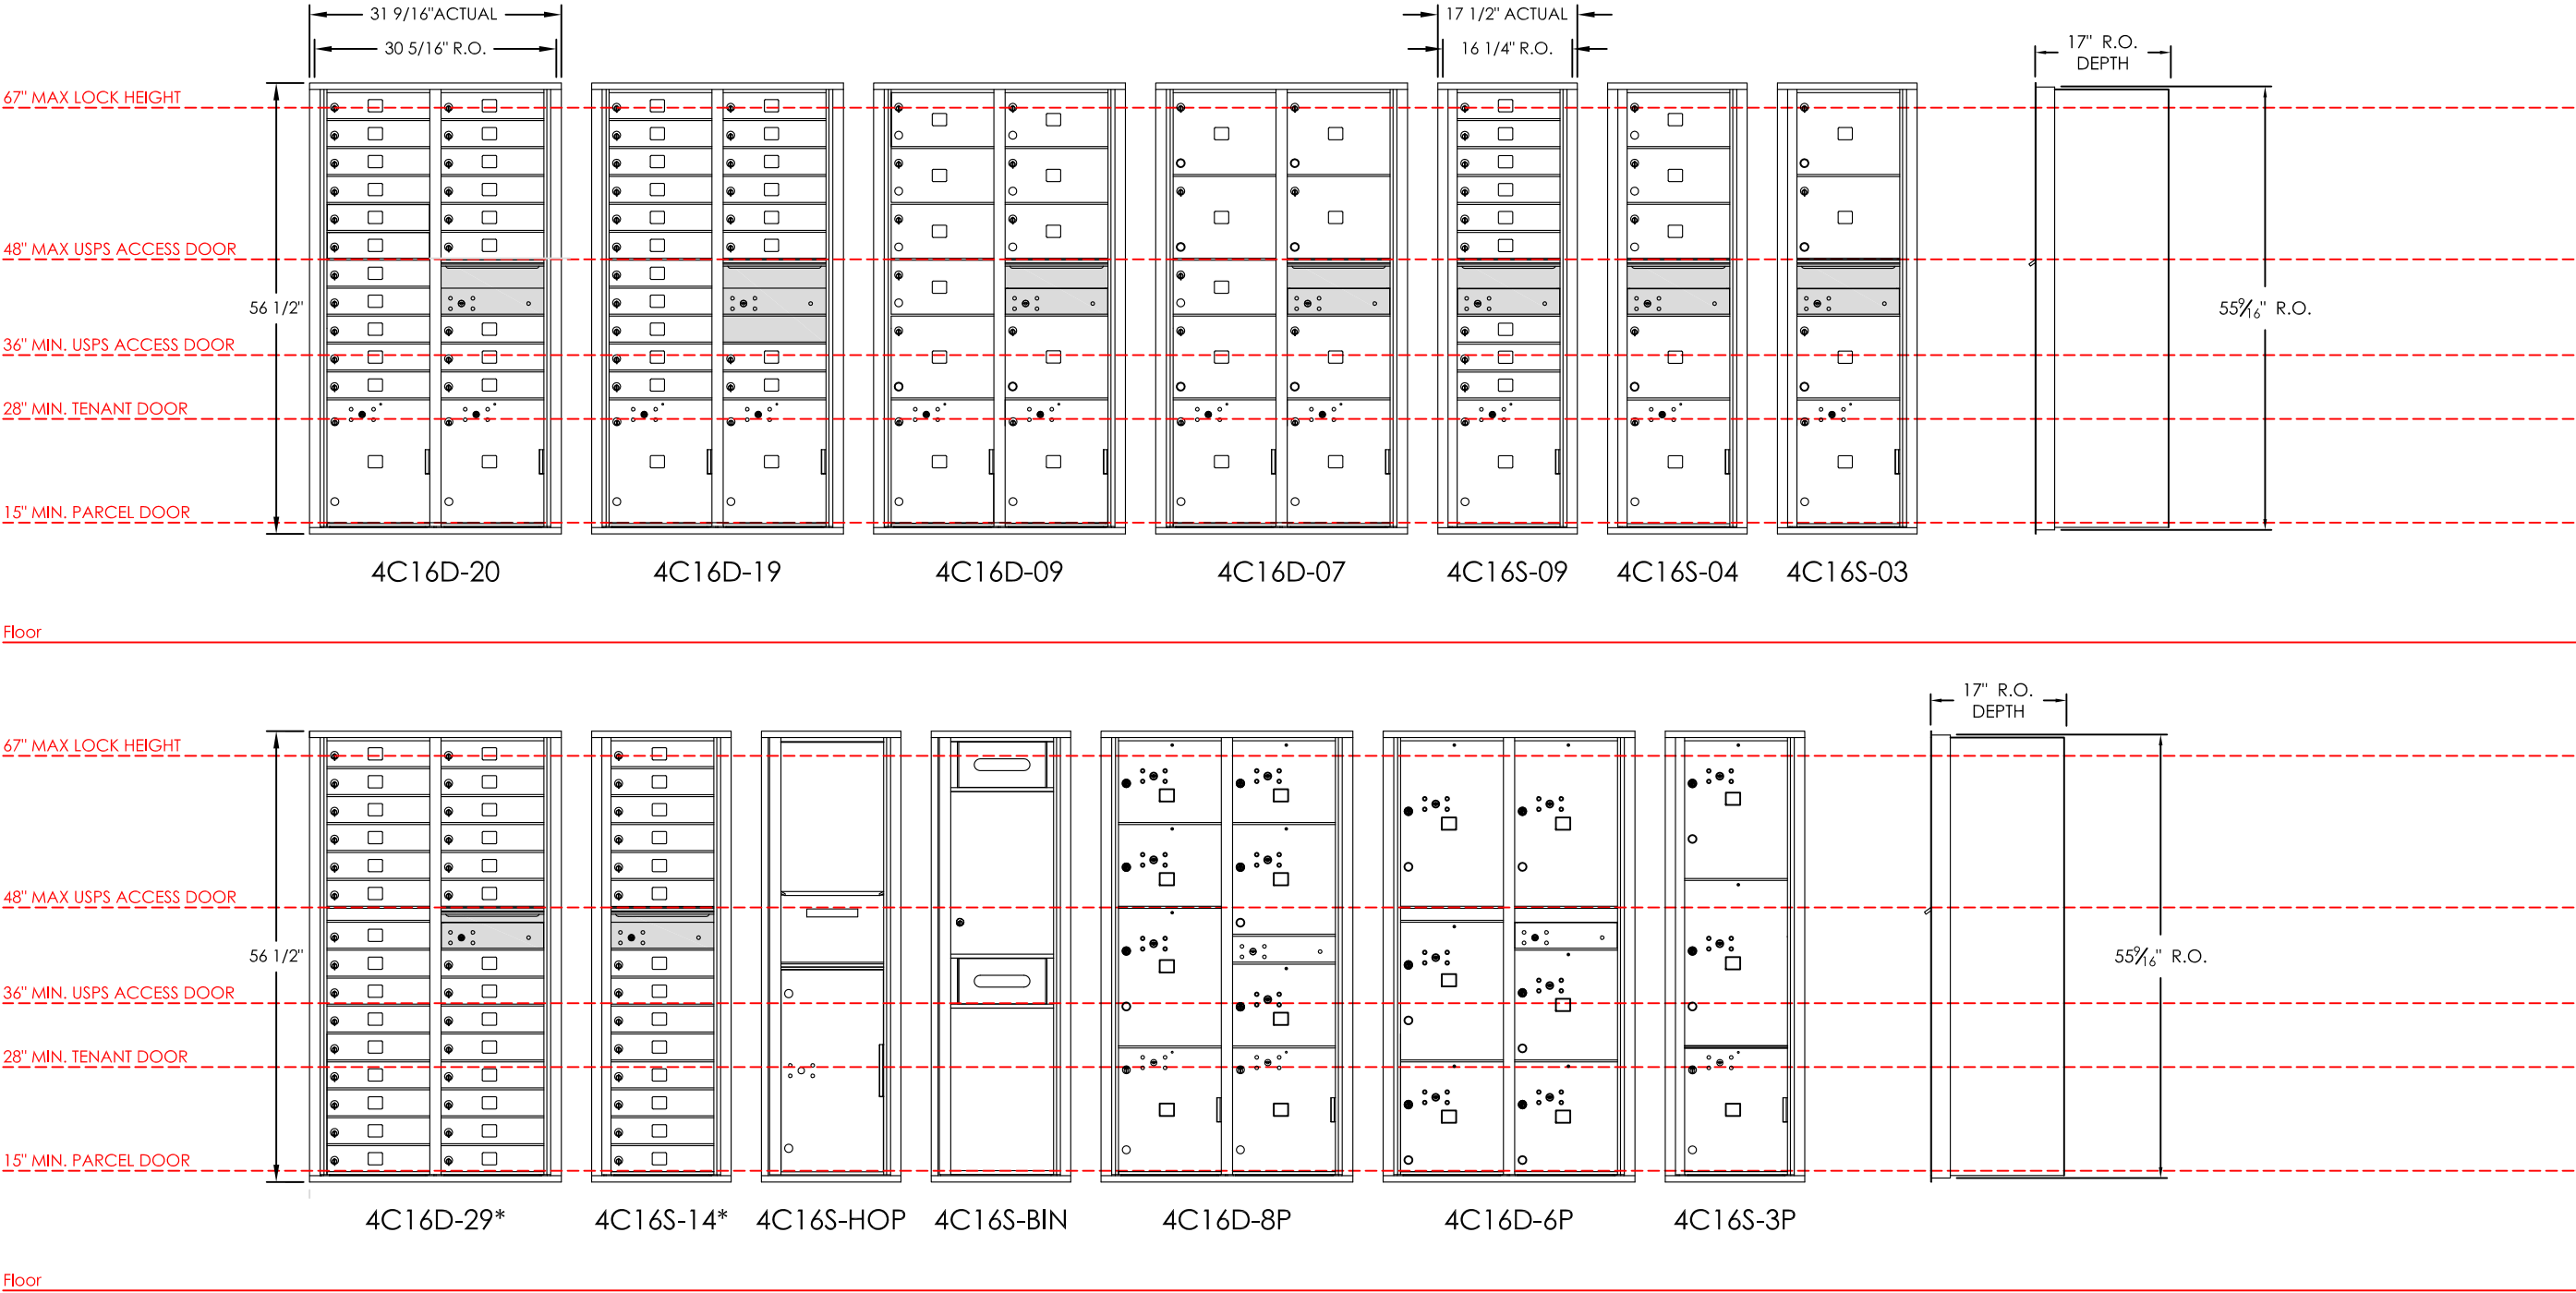

NOTES:

1. Below are the USPS STD-4C installation guidelines:
- a. At least one customer compartment shall be positioned less than 48" above finished floor (AFF).
 - b. No parcel locker (interior bottom shelf) shall be positioned less than 15" AFF.
 - c. No patron (tenant) lock shall be positioned more than 67" AFF.
 - d. No customer compartment (interior bottom shelf) shall be positioned less than 28" AFF.
 - e. The USPS Arrow lock shall be positioned 36" - 48" AFF.
2. Modules noted with * do not meet USPS STD-4C guidelines above.

PRODUCT SERIES: versatile™ 4C Mailbox Max Height Suite				
MODEL 4CMAX		REV A		
SCALE NONE		LAST REV DATE 5/15/2014		
DRAWING NUMBER 4CMAXCS		DRAWN BY AFD	SHEET 1 OF 1	