


SUPPLIES NEEDED:

- Large Flag** (part - FLAG LG)
- Flag Housing** (part - FLAG HSNG LG)
- Small Brass Knob** (part - KNOB SM)
- Screwdriver** (phillips)
- Small wrench or pliers**

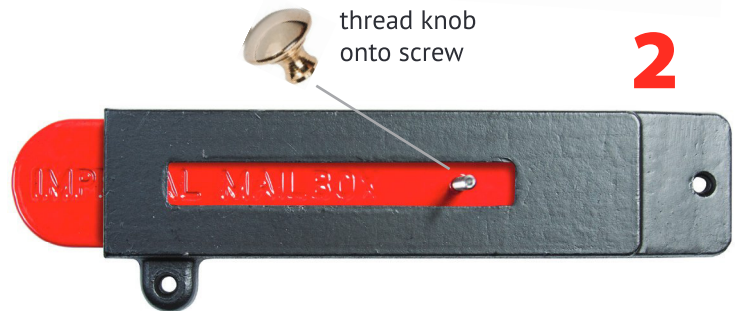

insert (2) screws and
tighten nut from
inside the
mailbox

4



Assembling Flag & Knob:

- 1 Insert the flag into the back of the housing so that the threaded screw (on the flag) goes through the slot in the housing.
- 2 Thread the brass knob onto the screw (on the flag) being careful not to overtighten.
- 3 Align the holes (2) of the flag housing with the corresponding holes on the mailbox.
- 4 Insert the two screws and thread the nuts onto them from inside the mailbox. Using a small wrench or pliers and a phillips head screwdriver, tighten the bolts.