Installation Manual CK25750

Postal to private conversion kit

Postal access point and parcel locker excluding high security CBU Rev 4



5935 Corporate Drive • Manhattan, KS 66503 www.florencemailboxes.com • 800.275.1747

TABLE OF CONTENTS

DESCRIPTION	PAGE
Parts List	3
630 Series, 1250 4B+ and Non 4B+ Series Vertical	4
12/120/130 Collection Boxes, Non-4B+ AF and AD Horizontals, Horizontal Hinged Rear Covers, NDCBU and Collection Bundle Centers	6
4B+ AF and AD Horizontals, CBU Series E and F, OPL F (1590T1) and AF4C Access Door	8
1400 Series Parcel Locker	10
2600 Series and OPL Version 1 (1590) Parcel Locker	12
CBU F Series and AF4C Parcel Locker	14
OPL Version 2 (1590V2) And IPL Parcel Locker	16
KK And K26 Series Key Keeper	18

This page intentionally left blank

Kit Content List

	CK2	5750
Qty	Description	
1	Private Lock Assembly	
4	3/16" Flat Washer	
4	#10-32 X .25" Flat Head Screw	
1	#10-32 X 1.125" Phillips Head Screw	
1	Plastic Spacer	
5	#10-32 X .375" One-Way Screw	
2	#10-32 X 1" Allen Head Screw	
2	#10-32 Tinnerman Clip	
2	#10-32 X 1.25" One-Way Screw	
4	#10-32 Lock Nut	
10	Spacer	
1	1400 Series Private Parcel Lock Cover	

Note: not all parts will be used for all installations.



630 series, 1250 4B+ and non 4B+ series Vertical Mailboxes

Before proceeding, you will need to determine if the unit has tinnerman clips to retain the lock. If it does not have them you will need to have the key to the tenant door with master lock hole.

- Turn the lock to unlock position. Install lock bottom first then bring top up into position.
- Open vertical unit by tilting
 Forward. Remove insert from frame.
- Install two (2) 84994 #10-32 x .375" one-way screws from the rear of insert.

Note: for verticals with tinnerman clips installed proceed to step 5.

- Reinsert unit into frame ensuring that the "press to close bar" is not damaged.
- Remove two (2) screws on top of insert, retain for reuse. Unlock and open door with master lock hole.
- **8** Lock and unlock to confirm operation.
- Slide two (2) 32401 #10-32 tinnerman clips on to security bracket from the bottom with the angle on clip edge to the outside.

Dispose of remaining hardware.

Reinstall security bracket with the two (2) original screws.

	PART #	DESCRIPTION
	-	Private lock assembly
REQUIRED TOOLS	84994	#10-32 X .375" One-way screw
Flat head screwdriver	32401	#10-32 Tinnerman clip

630 series, 1250 4B+ and non 4B+ series Vertical Mailboxes

4B+ Vertical w/o Clips



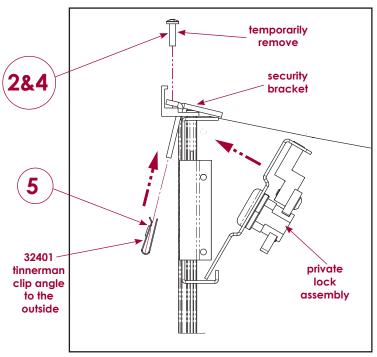


Fig. 1

Non 4B+, 630 Series And 4B+ With Clips **Vertical**

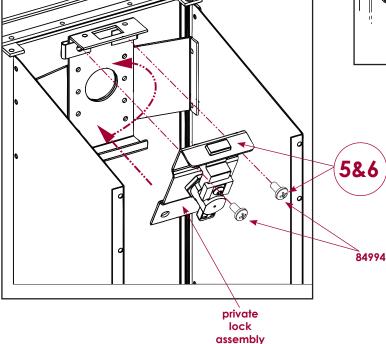

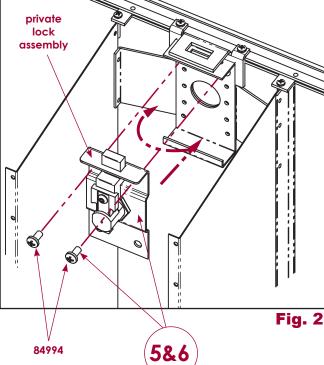

4B+ Vertical w/o Clips

12/120/130 Collection Boxes, Non-4B+ AF and AD Horizontals, Horizontal Hinged Rear Covers, NDCBU and Collection Bundle Centers

Open unit to gain access to back of postal door.

Close door or gate. Lock and unlock to confirm operation.

Position lock over 4 mounting screw holes.

Dispose of remaining hardware.

Install and tighten four (4) 30197 #10-32 x .25" Flat head screws.


Note: for collection bundle centers use four (4) 3/16" flat washers between lock and door.

Note: for 2600 series non 4B+ use four (4) 3/16" flat washers between lock and screws.


	PART #	DESCRIPTION
REQUIRED TOOLS	-	Private lock assembly
Flat head screwdriver	30197	#10-32 x .25" Flat head screw
	30194	3/16" Flat washer

12/120/130 Collection Boxes, Non-4B+ AF and AD Horizontals, Horizontal Hinged Rear Covers, NDCBU and Collection Bundle Centers

12/120/130 Collection Boxes and NDCBU

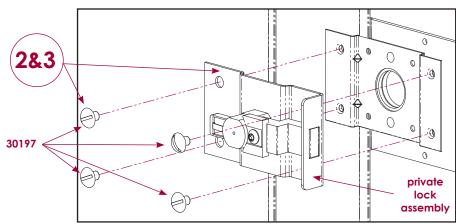

Collection Bundle Centers

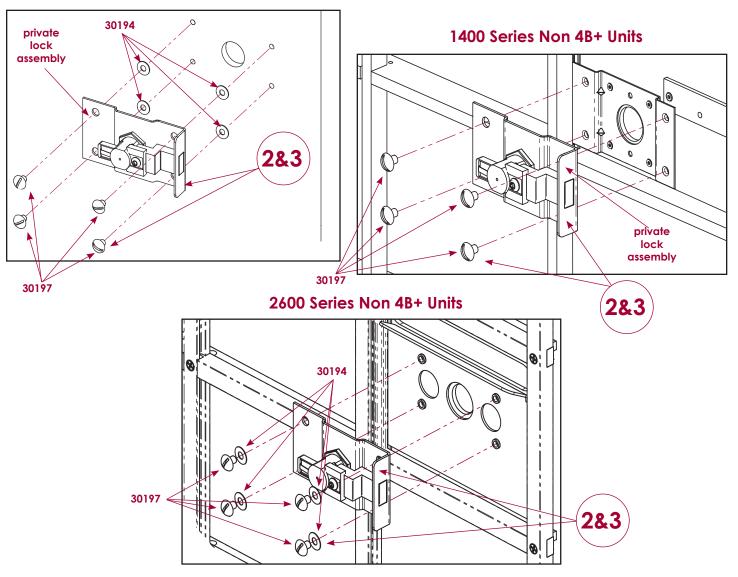

4B+ AF and AD Horizontals, CBU Series E and F, OPL F (1590T1) and AF4C Access Door

- Open unit to gain access to back of postal door.
- Install and tighten four (4) 86091 #10-32 lock nuts.
- Position lock over 4 mounting carriage bolts (on 1400 and 2600 series units be sure to hold the carriage bolts in place from the front of gate.)
 - Close postal access door or gate. Lock and unlock to confirm operation.

For CBU E and F, OPL F (1590T1) and AF4C add ten (10) 91124 spacer, two per inner stud and three per outer stud.


Dispose of remaining hardware.

REQUIRED TOOLS	
3/8" Nut driver	


PART	DESCRIPTION	
-	Private lock assembly	
86091	#10-32 Lock nut	
91124	Spacer	

4B+ AF and AD Horizontals, CBU Series E and F, OPL F and AF4C Access Door

1400 Series 4B+

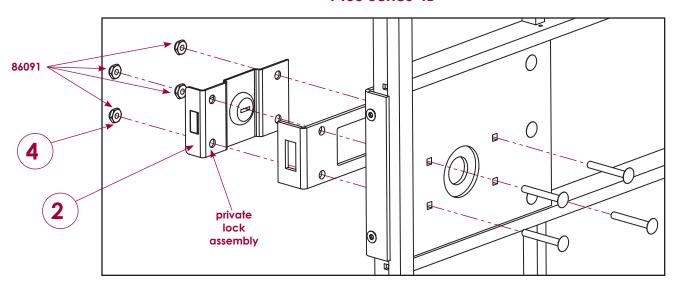

CBU E, CBU F, OPL F (1590T1) and AF4C*

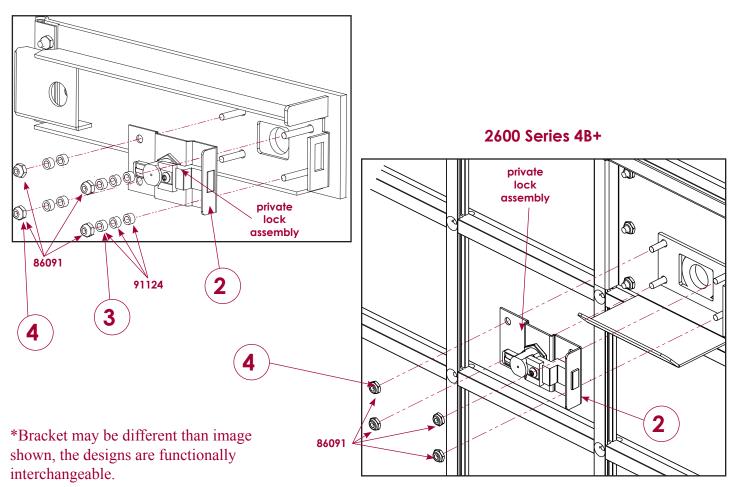



1400 Series Parcel Locker

Open parcel door.


- Lock and unlock to confirm operation.
- Install lock assembly as shown and secure with two (2) 30197 #10-32 X .25" flat head screws in the top right and bottom left positions.

Dispose of remaining hardware

Install one (1) 25734 1400 series private parcel lock cover with two (2) 85098 #10-32 x 1" Allen head screws.

	PART #	DESCRIPTION
	-	Private lock assembly
REQUIRED TOOLS	30197	#10-32 x .25" Flat head screw
Flat head screwdriver	85098	#10-32 X 1" Allen head screw
5/32" Allen head driver	25734	Private parcel lock cover

1400 Series Parcel Locker

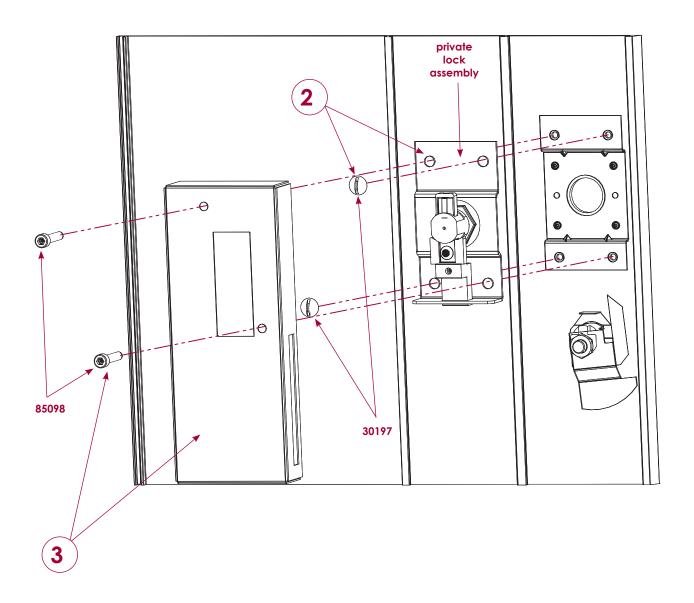



2600 Series and OPL Version 1 (1590) Parcel Locker

Note: If the parcel lock cover is held on by one screw you have a OPL version 1 (1590). If not, go to instructions on page 16, to determine if you have OPL version 2 (1590v2) or instructions on page 14, to determine if you have OPL F (1590T1).

Install existing parcel lock cover, secure with one (1) 1100-123 #10-32 X 1.125" Phillps head screw.

Open parcel door.


- **5** Lock and unlock to confirm operation.
- Slide one (1) 25735 plastic spacer over the locking bracket. Ensure spacer is centered along bracket.

Dispose of remaining hardware

Install lock assembly as shown and secure with four (4) 3/16" washers and four (4) 30197 #10-32 X .25" flat head screws.

	PART #	DESCRIPTION
	-	Private lock assembly
	30197	#10-32 x .25" Flat head screw
REQUIRED TOOLS	30194	3/16" Flat washer
Flat head screwdriver	25735	Plastic spacer
#2 Phillips screwdriver	1100-123	#10-32 X 1.125" Phillips screw

2600 Series and OPL Version 1 Parcel Locker

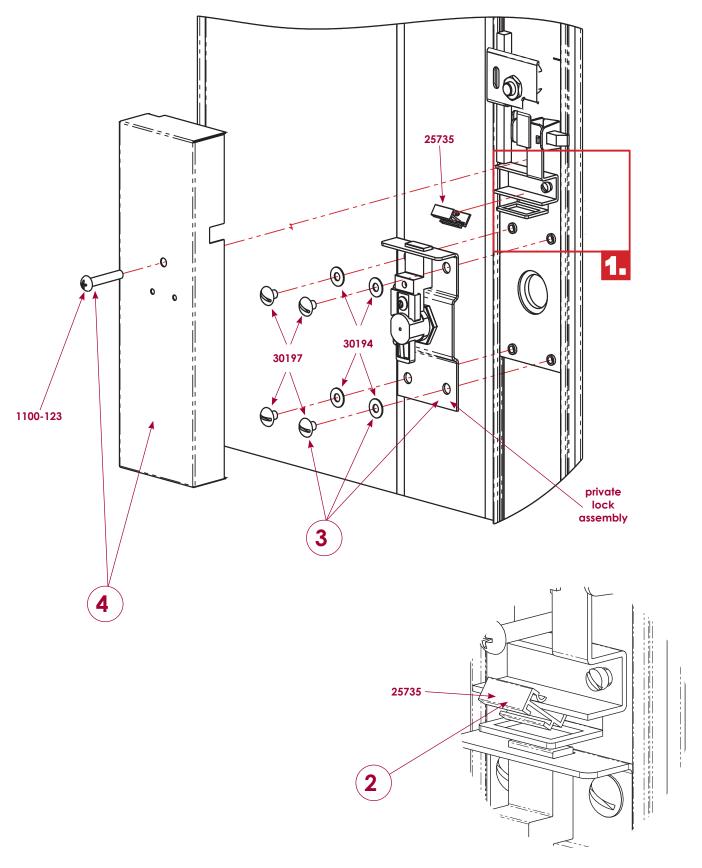



CBU F, OPL F and AF4C Parcel Locker

Note: If the parcel lock cover is held on by two screw (one on top and one on bottom) you have a OPL F (1590T1). If not, go to instructions on page 12, to determine if you have OPL version 1 (1590) or instructions on page 16, to determine if you have OPL version 2 (1590v2).

Install existing parcel lock covers, secure with five (5) 84994 #10-32 X .375" one-way head screws.

Note: For AF4C and OPL F only one cover and two (2) 84994 #10-32 x.375" One-way head screws required.

Open parcel door.

5 Lock and unlock to confirm operation.

Install lock assembly as shown with eight (8) 91124 spacers, two per stud.

Secure with four (4) 86091 #10-32 lock nuts.


Dispose of remaining hardware

REQUIRED TOOLS	
3/8" Nut driver	
Flat head screwdriver	


PART #	DESCRIPTION		
-	Private lock assembly		
86091	10-32 Lock nut		
91124	Spacer		
84994	#10-32 X .375" One-way screw		

CBU F, OPL F and AF4C Parcel Locker

CBU F Parcel

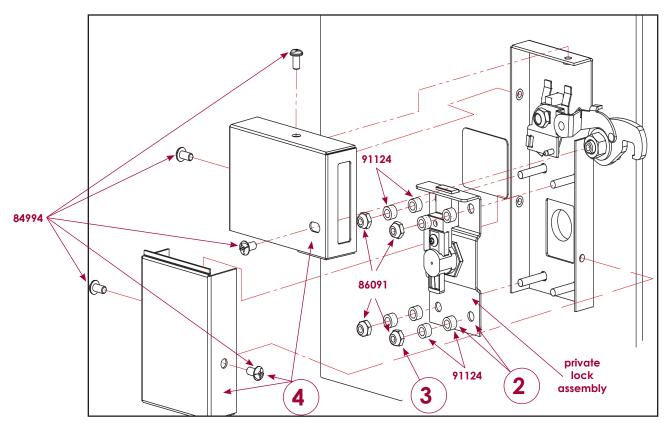

AF4C and OPL F Parcel

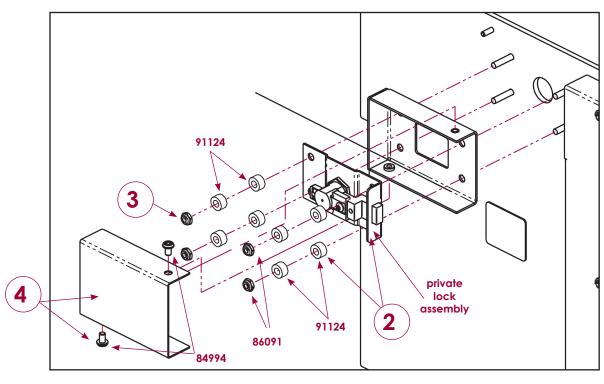



OPL Version 2 and IPL Parcel Locker

Note: If the parcel lock cover is held on by two screw you have a OPL version 2 (1590V2). If not, go to instructions on page 12, to determine if you have OPL version 1 (1590) or instructions on page 14, to determine if you have OPL F (1590T1).

Install existing parcel lock cover, secure with two (2) 950410 #10-32 X 1.25" one-way head screws.


Open parcel door.

- Lock and unlock to confirm operation.
- Install lock assembly as shown and secure with two (2) 30197 #10-32 X .25" flat head screws in the upper left and lower right positions.

Dispose of remaining hardware

	PART #	DESCRIPTION
REQUIRED TOOLS	-	Private lock assembly
3/8" Nut driver	30197	#10-32 X .25" Flat head screw
Flat head screwdriver	950410	#10-32 X 1.25" One-way screw

OPL Version 2 and IPL Parcel Locker

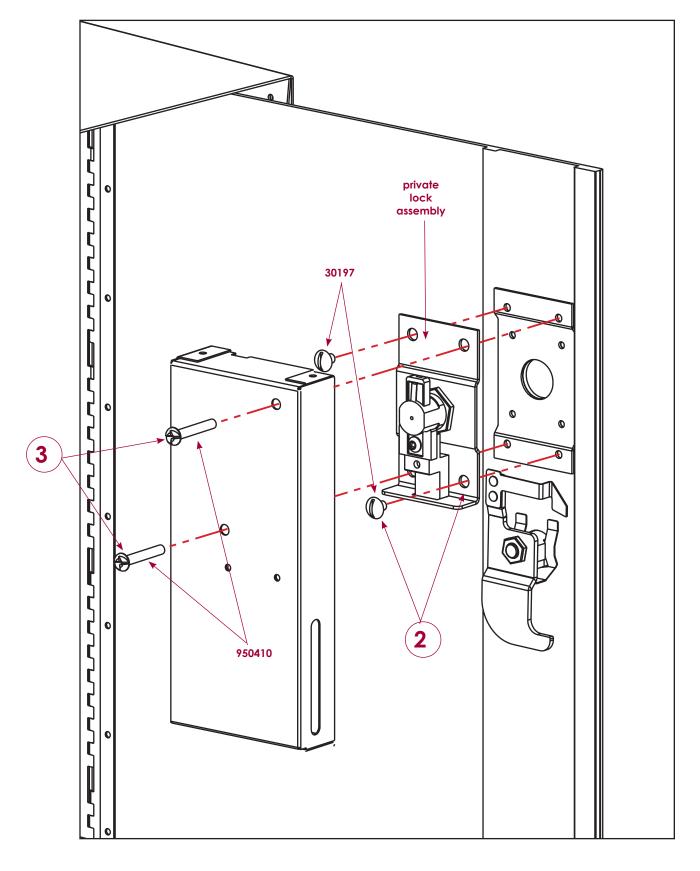



KK and K26 Series Key Keeper

For KK series key keepers:

For K26 series key keeper:

- with four (4) 30197 #10-32 X .25" flat head screws.
- Install lock assembly as shown and secure Install lock assembly as shown and secure with four (4) 30197 #10-32 X .25" flat with four (4) 86091 #10-32 lock nuts. Install lock assembly as shown and secure
- Lock and unlock to confirm operation.
- **2a** Lock and unlock to confirm operation.


Dispose of remaining hardware

Dispose of remaining hardware

	PART #	DESCRIPTION
REQUIRED TOOLS	-	Private lock assembly
3/8" Nut driver	86091	#10-32 Lock nut
Flat head screwdriver	30197	#10-32 X .25" Flat head screw

KK and K26 Series Key Keeper

KK Series Keykeeper

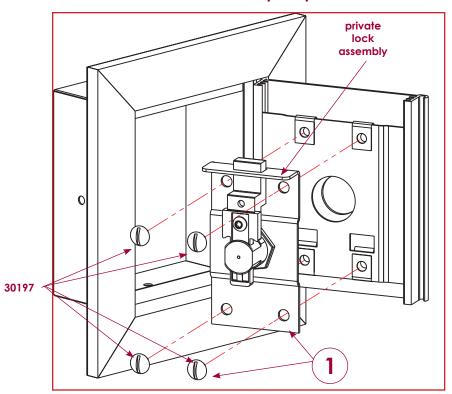

K26 Series Key Keeper

